


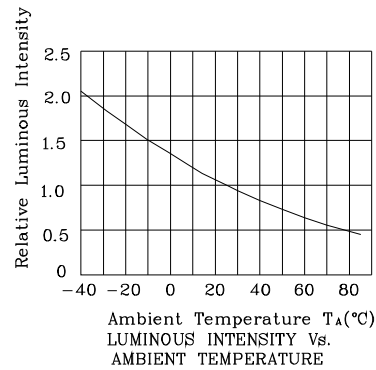

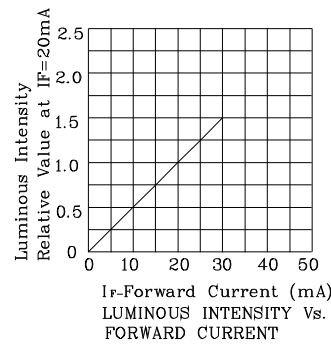
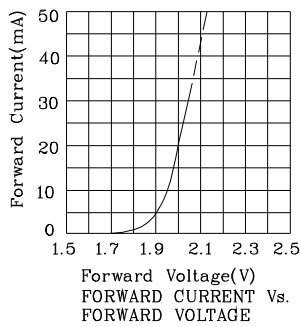
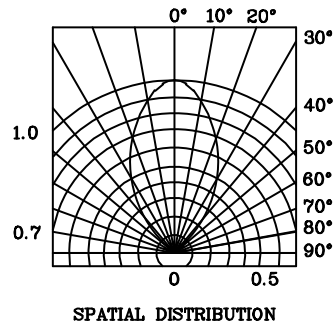
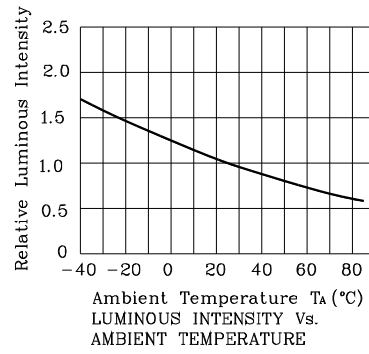




❖ UR



❖ UY



Wave Soldering Profile For Lead-free Through-hole LED.

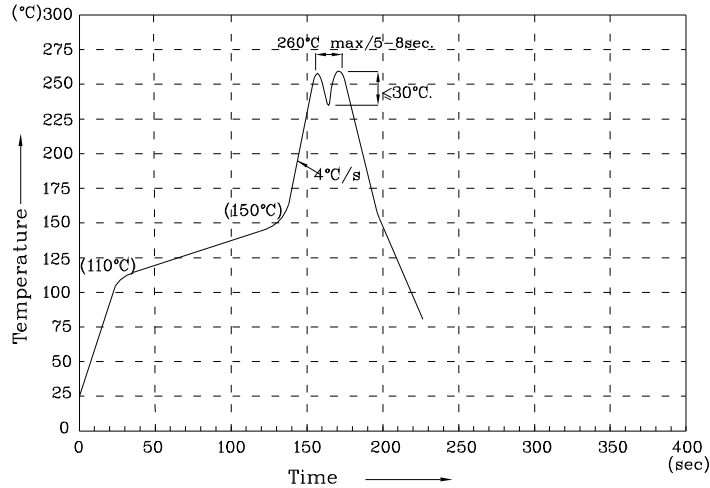

NOTES:

1. Recommend the wave temperature 245°C~260°C. The maximum soldering temperature should be less than 260°C.
2. Do not apply stress on epoxy resins when temperature is over 85 degree°C.
3. The soldering profile apply to the lead free soldering (Sn/Cu/Ag alloy).
4. No more than once.

Remarks:

If special sorting is required (e.g. binning based on forward voltage, luminous intensity / luminous flux or wavelength), the typical accuracy of the sorting process is as follows:



1. Wavelength: +/-1nm
2. Luminous Intensity / luminous flux: +/-15%
3. Forward Voltage: +/-0.1V



Note: Accuracy may depend on the sorting parameters.



PACKING & LABEL SPECIFICATIONS

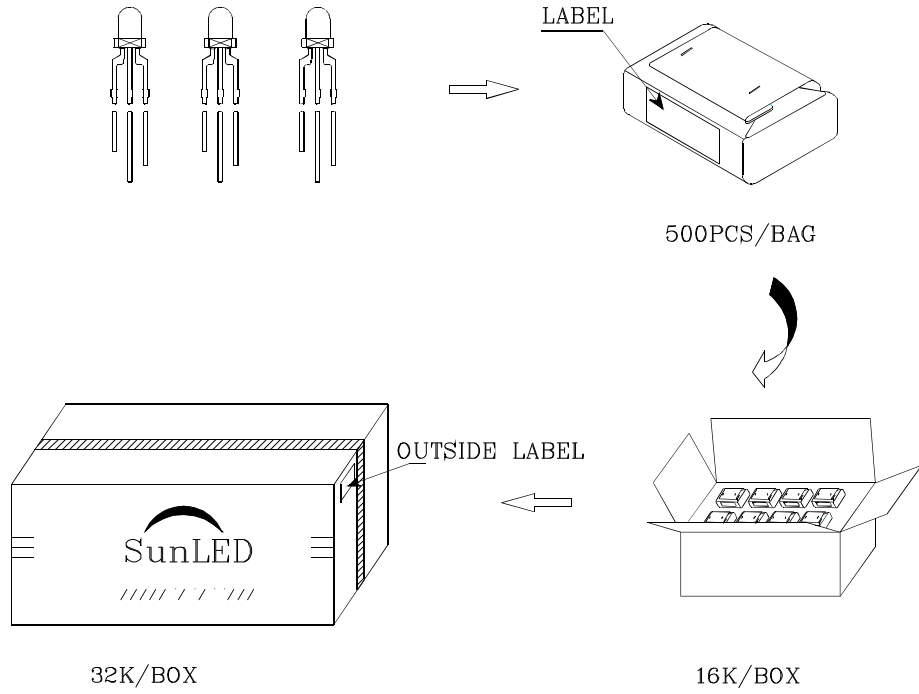LUYR92M

| |
|---|
|  |
| P/N0 : Lxxx92x |
| QTY : 500 pcs CODE: XXX |
| S/N : XX |
| LOT NO:  XXXXXXXXXXXXXXXXXXXXXXXXXXXX |
| RoHS Compliant |